


## 4-Cylinder, Low-Pressure Diaphragm Pumps

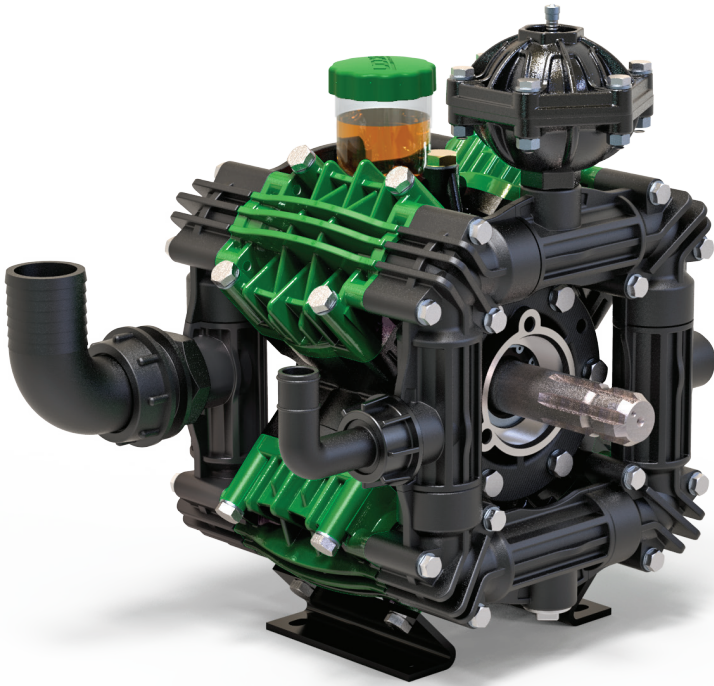

ZETA 200 low pressure 4-cylinder diaphragm pumps have anodized aluminum bodies with plasticized aluminum heads, stainless steel valves and glass-filled nylon manifolds. A pulsation dampener standard on all models.

ZETA 200 pumps are excellent for various horticultural and agricultural spraying applications.

Pumps are available with a 1-3/8" Male PTO thru-shaft or 2-bolt A-flange hydraulic motor mount with 1" hollow shaft.

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
ZETA 200 TS2C	53.0	198	300	20	550	1-3/8" 6-Spline Male PTO Thru-Shaft	58 LBS
ZETA 200 MI1	53.0	198	300	20	550	2-Bolt, A-Flange, 1" Hollow Shaft for Hydraulic Motor	58 LBS


Specifications	ZETA 200	Description	Part #
Inlet Port	2" Hose Barb	Diaphragm Kit (GREENTECH)	6062.H3
Outlet Port	1" Hose Barb	Diaphragm Bolt & Washer Kit	6062.D6
Piston Diameter	80.0mm	Valve Kit	6062.D5
Crankshaft Stroke/Code	19.0mm / U	Complete Repair Kit	8700.41CK
Dimensions	15.5"L x 12.5"W x 17.5"H		

**Lubrication:** Requires 44 oz. of Udor Lube 40W Premium Pump Oil.  
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.



Maximum Flow	53.0 GPM / 198 lpm
Maximum Pressure	300 PSI / 20 bar
Maximum RPM	550
Inlet Port - Hose Barb	1-1/2" HB
Outlet Port - Hose Barb	1" HB
Bypass - Hose Barb	-
Dimensions	15.5"L x 12.5"W x 17.5"H
Weight	58 lbs

**Lubrication:** Requires 44 oz. of Udor Lube 40W Premium Pump Oil.  
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

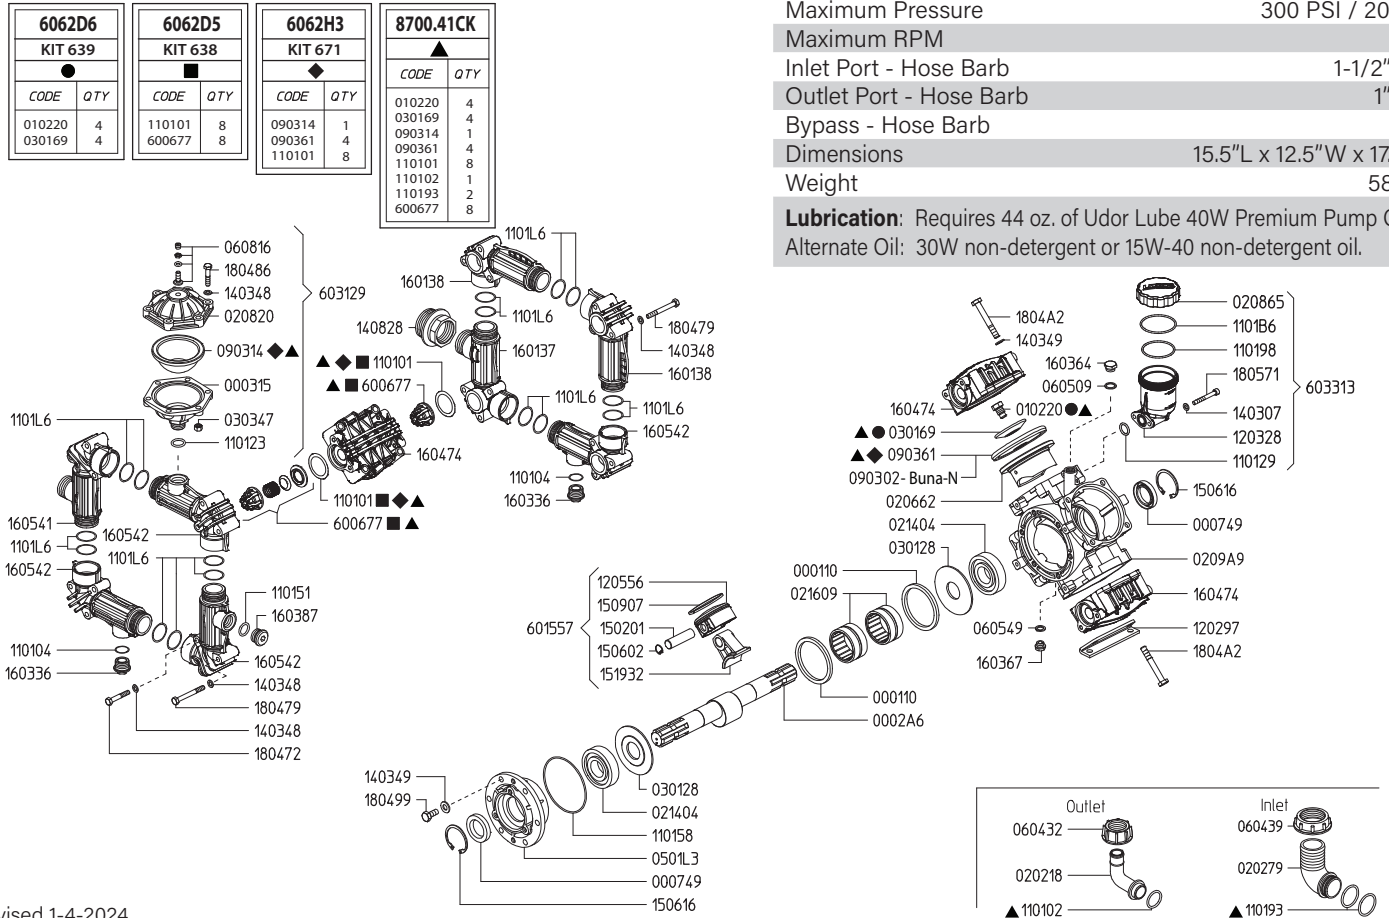

Revised 1-4-2024

Part #	Description	Qty
0001.08	RETAINER RING	1
0002.A6	CRANKSHAFT TS 2C	1
0003.15	ACCUMULATOR BASE	1
0007.49	OIL SEAL D35	2
0102.20	DIAPHRAGM BOLT ●▲	4
0202.18	HOSE BARB D25	1
0202.79	HOSE BARB D50	1
0206.62	SLEEVE D80	4
0208.20	ACCUMULATOR COVER	1
0208.65	OIL RESERVIOR CAP	1
0209.A9	CRANKCASE	1
0214.04	BALL BEARING D35	2
0301.69	DIAPHRAGM WASHER ●▲	4
0301.28	ROD DISC D35	2
0302.59	ROD DISC	1
0303.47	HEX NUT M8X8	6
0501.L3	BEARING FLANGE "ZETA 170...300"	1
0604.32	BARB NUT G1"1/4	1
0604.50	BARB NUT G1-1/2"	1
0605.09	GASKET D17	1
0605.49	GASKET D13	1
0608.16	AIR VALVE ASSEMBLY	1
0903.02	PISTON DIAPHRAGM - BUNA-N 116MM	4
0903.14	DIAPHRAGM WASHER ●▲	1
0903.61	PISTON DIAPHRAGM - GREENTECH 116MM ◆▲	4
1101.01	O-RING - VALVE◆■▲	8
1101.02	O-RING - DISCHARGE BARB▲	1
1101.04	O-RING - DRAIN PLUG	2
1101.23	O-RING - PRESSURE ACCUMULATOR	1
1101.29	O-RING - OIL RESERVIOR	1
1101.51	O-RING - PLUG	1
1101.58	O-RING - BODY FLANGE	1
1101.93	O-RING - INLET BARB▲	2
1101.98	O-RING - OIL RESERVIOR	1
1101.B6	O-RING - OIL RESERVIOR	1
1101.L6	O-RING - MAINFOLD TUBE	16
1202.97	BASE PLATE	2

Part #	Description	Qty
1203.28	OIL RESERVIOR	1
1205.56	ALUMINIUM PISTON D80	4
1403.07	WASHER M6	2
1403.48	WASHER M8	30
1403.49	WASHER M10	18
1502.01	PIN D18X64	4
1506.02	SNAP RING D18	4
1506.16	SNAP RING D55	2
1509.07	PISTON RING D80	4
1519.35	CONNECTING ROD	4
1601.37	SUCTION MANIFOLD G1"1/2 M	1
1601.38	INLET-OUTLET MANIFOLD	2
1603.36	PLUG G3/4	2
1603.64	PLUG G3/8	1
1603.67	PLUG G1/4	1
1603.87	PLUG G3/4	1
1604.74	HEAD	4
1605.41	OUTLET MANIFOLD G1"1/4 M	1
1605.42	INLET-OUTLET MANIFOLD G3/4 F	4
1804.72	HEX BOLT M8X50	8
1804.79	HEX BOLT M8X70	16
1804.86	HEX BOLT M8X40	6
1804.99	HEX BOLT M10X25	6
1804.A2	HEX BOLT M10X75	16
1805.71	ALLEN BOLT M6X50	2
6006.77	VALVE ASSEMBLY W/O O-RING ■▲	8
6015.57	ROD ASSEMBLY D80 PISTON	4
6031.29	PRESSURE ACCUMULATOR ASSEMBLY	1
6033.13	OIL RESERVOIR ASSEMBLY	1
6062.D5	IN/OUTLET VALVE KIT (KIT 638)	1
6062.D6	DIAPHRAGM BOLT & WASHER (KIT 639)	1
6062.H3	DIAPHRAGM KIT - GREENTECH (KIT 671)	1
8700.41CK	COMPLETE REPAIR KIT	1

- Parts in 6062.D5 (Kit 638).
- Parts in 6062.D6 (Kit 639).
- ◆ Parts in 6062.H3 (Kit 671).
- ▲ Parts in KIT# 8700.41CK





# ZETA 170/200 DIMENSIONS

All Dimensions are WITHOUT Control Unit or Regulator

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

Specifications	ZETA 170	ZETA 200
Inlet Port - Hose Barb	1-1/2" HB	2" HB
Outlet Ports - Hose Barb	1" HB	1" HB
Dimensions - Pump Only	15.5"L x 12.5"W x 17.5"H	
Diaphragm Material	GREENTECH (Std) Buna-N (Opt)	

**Lubrication:** Requires 39 oz. of Udor Lube 40W Premium Pump Oil. Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

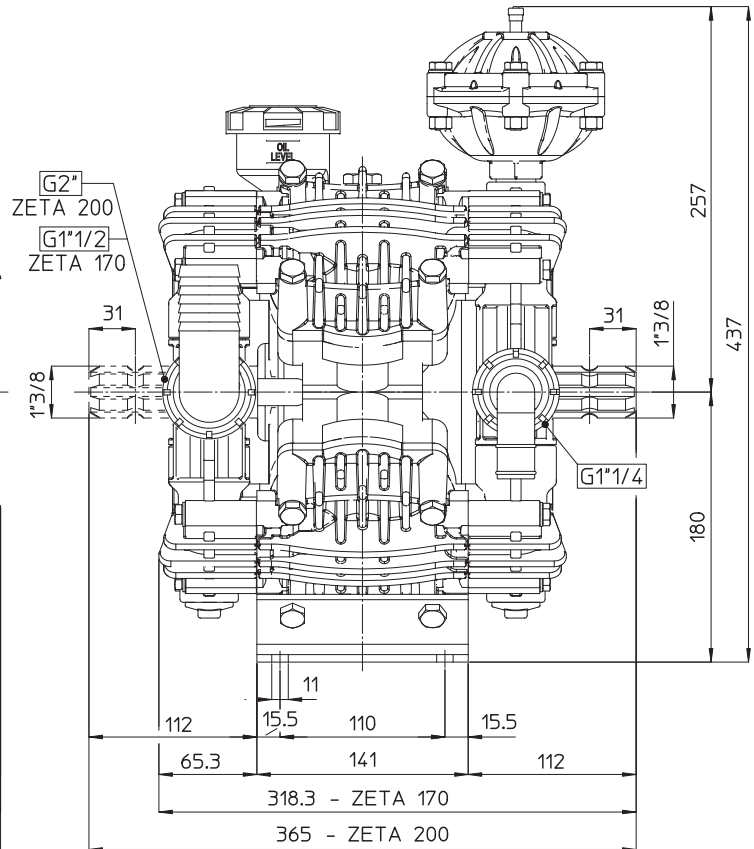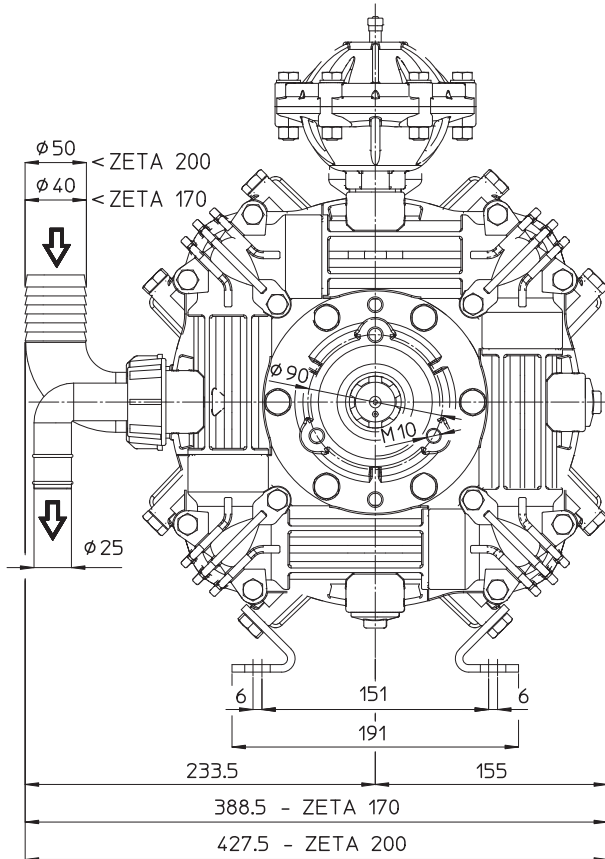

## TORQUE SPECS

Ref.	Description	Ft./lb.	Nm
1	Diaphragm Bolts (Use Loctite 243)	22	30
2	Head Bolts	30	40
3	Pulsation Dampener Bolts	18	25
4	Oil Cup Bolts	6	8
5	Manifold Bolts (Plastic)	14	20
NS	Bearing Flange Bolts (not shown)	25	34

